


MICROTUNNELLING AT HALL NOOK FAS, PENKETH, WARRINGTON

Client:

United Utilities

Summary:

Construct trench sheeted launch
and reception pits

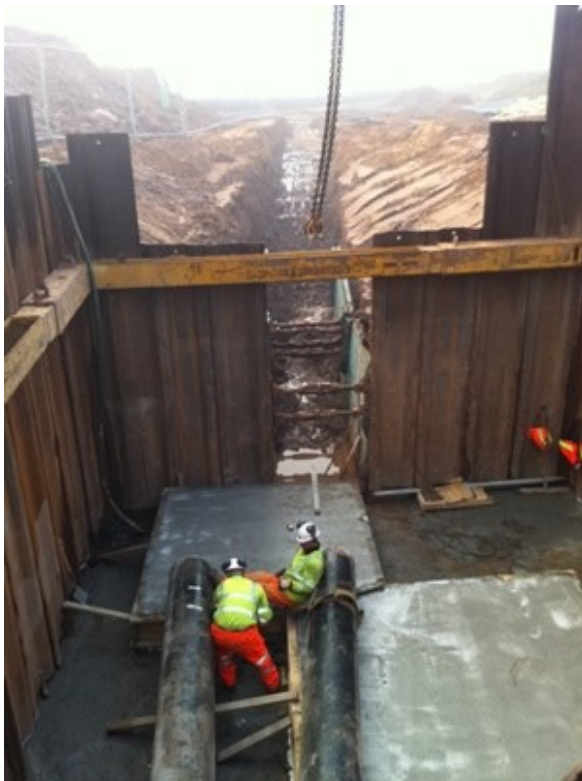

PROJECT DETAILS

MICROTUNNELLING

Construction of trench sheeted launch and reception pits. 1500 AVN machine to install 72m long combined railway and canal crossing using PCC jacking pipes.

Install MDPE product pipes within sleeve - 2No 500mm & 1No 700mm. Install manifold pipe work and construct manholes and valve chambers within pits.

GROUND CONDITIONS

- Clay

Note: On this project SPI Appleton Ltd (part of the A E Yates Group) completed the piling works prior to our arrival on site.